

# NAVAL POSTGRADUATE SCHOOL

## Monterey, California



## THESIS

**MODELING THE PERFORMANCE OF THE  
PT SUR HYDROPHONE ARRAY IN  
LOCALIZING BLUE WHALES**

by

Carl Allen Hager

September, 1997

Thesis Advisors:

Ching-Sang Chiu  
Curtis Collins

Approved for public release; distribution is unlimited.

19980417 142

DTIC QUALITY INSPECTED 4

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instruction, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188) Washington DC 20503.				
1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE September 1997		3. REPORT TYPE AND DATES COVERED Master's Thesis
4. TITLE AND SUBTITLE MODELING THE PERFORMANCE OF THE PT SUR HYDROPHONE ARRAY IN LOCALIZING BLUE WHALES			5. FUNDING NUMBERS	
6. AUTHOR(S) Carl Allen Hager				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Naval Postgraduate School Monterey CA 93943-5000			8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)			10. SPONSORING/MONITORING AGENCY REPORT NUMBER	
11. SUPPLEMENTARY NOTES The views expressed in this thesis are those of the author and do not reflect the official policy or position of the Department of Defense or the U.S. Government.				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.			12b. DISTRIBUTION CODE	
13. ABSTRACT (maximum 200 words) The acoustic activity of the blue whale is widely documented yet poorly understood. Hypotheses for its vocalizations range from communication, bathymetric echolocation and echolocation of zooplankton masses. Although extensive documentation of frequency structure and duration exists, a long-term monitoring of where and when the vocalizations are being made must be accomplished to test the validity of these theories. The Naval Postgraduate School (NPS) Ocean Acoustic Observatory (OAO), which operates a former Sound Surveillance System (SOSUS) at Pt Sur, presents itself as a potentially valuable tool in the detection and localization of Pacific blue whales. By estimating the transmission loss as a function of bearing, range and frequency and synthesizing the ambiguity surface of various model-data linear correlation localization algorithms, an assessment of the array's expected performance for this purpose was obtained. Important findings of this modeling study include estimated maximum detection ranges are longer than 500 kilometers both seaward and along the continental slope due to array beamforming gains and matched field localization algorithms are accurate and robust in the presence of white noise. The application of the results of this study towards the development of a "real-time", large-area blue whale localization and tracking algorithm is promising.				
14. SUBJECT TERMS Blue Whales, Cross-correlation, localization, algorithm, vocalizations			15. NUMBER OF PAGES 51	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified	20. LIMITATION OF ABSTRACT UL	

NSN 7540-01-280-5500

Standard Form 298 (Rev. 2-89)  
Prescribed by ANSI Std. Z39-18 298-102



Approved for public release; distribution is unlimited.

MODELING THE PERFORMANCE OF THE PT SUR HYDROPHONE  
ARRAY IN LOCALIZING BLUE WHALES

Carl Allen Hager  
Lieutenant Commander, United States Navy  
B.S., United States Naval Academy, 1986

Submitted in partial fulfillment  
of the requirements for the degree of


MASTER OF SCIENCE IN PHYSICAL OCEANOGRAPHY

from the

NAVAL POSTGRADUATE SCHOOL

September 1997

Author:

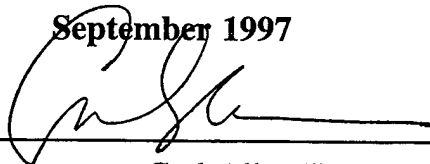


Carl Allen Hager


Approved by:



Ching-Sang Chiu, Thesis Advisor



Curtis Collins, Co-Advisor

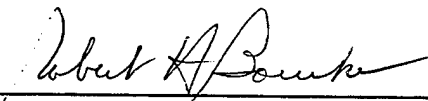

Robert H. Bourke, Chairman  
Department of Oceanography



## ABSTRACT

The acoustic activity of the blue whale is widely documented yet poorly understood. Hypotheses for its vocalizations range from communication, bathymetric echolocation and echolocation of zooplankton masses. Although extensive documentation of frequency structure and duration exists, a long-term monitoring of where and when the vocalizations are being made must be accomplished to test the validity of these theories.

The Naval Postgraduate School (NPS) Ocean Acoustic Observatory (OAO), which operates a former Sound Surveillance System (SOSUS) at Pt Sur, presents itself as a potentially valuable tool in the detection and localization of Pacific blue whales. By estimating the transmission loss as a function of bearing, range and frequency and synthesizing the ambiguity surface of various model-data linear correlation localization algorithms, an assessment of the array's expected performance for this purpose was obtained. Important findings of this modeling study include estimated maximum detection ranges are longer than 500 kilometers both seaward and along the continental slope due to array beamforming gains and matched field localization algorithms are accurate and robust in the presence of white noise. The application of the results of this study towards the development of a "real-time", large-area blue whale localization and tracking algorithm is promising.



## TABLE OF CONTENTS

I.	INTRODUCTION.....	1
A.	BACKGROUND .....	1
B.	THESIS OBJECTIVES .....	1
C.	OUTLINE .....	2
II.	METHODOLOGY.....	5
A.	DETECTION RANGE ESTIMATION.....	5
1.	Environmental Model .....	5
2.	Acoustic Propagation Model .....	6
3.	Figure of Merit Estimate .....	8
B.	LOCALIZATION PERFORMANCE SIMULATION .....	10
1.	Signal Models .....	10
2.	Localization Algorithm and Test Procedure .....	11
III.	ANALYSIS AND RESULTS .....	15
A.	DETECTION RANGE .....	15
B.	LOCALIZATION PERFORMANCE .....	15
1.	Footprint .....	15
2.	False Targets .....	16
3.	Effects of White Noise .....	17
IV.	CONCLUSIONS .....	19
	LIST OF REFERENCES .....	35
	INITIAL DISTRIBUTION LIST .....	39





## ACKNOWLEDGMENTS

It seems that the Northern Right Whale has caused quite a stir by not avoiding the ships transiting their winter grounds. One of a many near extinction, these magnificent animals have expedited the introduction of many seagoing organizations into the unlikely field of whale conservation. It appears that even an aviator has joined the ranks.

I have to recognize a substantial population of people that have assisted me with this thesis. The biology portion included; Dr. Chris Clark, Harold Mills and Russ Charif of Cornell University, Sean Hayes of the University of California at Santa Cruz and Dr. Eugene Haderlie of the Naval Postgraduate School. Surrounded by the most spectacular ecosystem on the planet, Dr. Haderlie reignited my passion for the sea. Additionally, gratitude must be directed towards LT Matt Pickett, a pilot for the NOAA Corps. The four days of flying, which included the sighting of over 25 blue whales, was absolutely a phenomenal experience.

The acoustics portion was fueled foremost by my advisor Dr. Ching-Sang Chiu. His patience in dealing with my perpetual "blank stare" merits a presidential citation. Chris Miller, Rob Bourke and Stephan Hudson, although most certainly celebrating my departure, deserve a wealth of gratitude for helping to tame the computer demons that haunt me still. Dr. Curtis Collins, who actually convinced Dr. Chiu to take me onboard with only six months until graduation, deservingly will receive all financial proceeds from this project.

Most crucially, I am in the deepest debt to my wife, Angie, and my children, Catherine and Jacob, for enabling me to accomplish this task. Angie's exceptional patience and loving support made this project one of the highlights of my life.



## **I. INTRODUCTION**

### **A. BACKGROUND**

The acoustic activity of the blue whale, *Balaenoptera musculus*, is widely documented yet poorly understood. Although evidence of assumed biological origin low frequency calls has existed since the 1960's (Walker, 1963; Kibblewhite et al., 1967; Northrup et al., 1968), it is not clearly known what causes them to vocalize. Hypotheses for balaenopterid vocalizations range from communication (Payne and Webb, 1971; Watkins, 1981, Watkins et al., 1987), bathymetric echolocation (Clark, 1994; Clark and Ellison, 1993) and echolocation of zooplankton masses (Payne and Webb, 1971; Watkins, 1981). Although extensive documentation of frequency structure and duration exists, a long-term monitoring of where and when the vocalizations are being made must be accomplished to test the validity of these theories.

The Naval Postgraduate School (NPS) Ocean Acoustic Observatory (OAO), which operates a former Sound Surveillance System (SOSUS) at Pt Sur, presents itself as a potentially valuable tool in the detection and localization of Pacific blue whales. Experiments (Clark and Fistrup, 1995; McDonald et al., 1995) have verified that low frequency calls of blue whales can easily be detected in this way. The 1995 experiment, which occurred off of the southern California coast using a combination of SOSUS and additional passive acoustic devices, determined that acoustic detections of blue whales exceeded visual sightings by a ratio of 6:1 (Clark and Fistrup, 1995).

### **B. THESIS OBJECTIVES**

Several direct recordings of the blue whale vocalization have resulted in an

understanding of their characteristic calls. In Table 1, a summary of these published historical recordings are presented in chronological order. These recordings demonstrate the consistency of the animal's calls and lead to the classification of the "A" and "B" type signals.

The primary objective of this thesis focuses on the feasibility of detecting and localizing each of the primary signals produced by the blue whale; the "A" call, an amplitude modulated signal with a carrier at 90 Hz, the "B" call, a frequency modulated signal centered at 17 Hz and a 51 Hz tonal embedded in the "B" call. Each of the 90, 17 and 51 Hz signals and their respective propagation in a model Central Pacific ocean are synthesized as if the whale were vocalizing at a distance from the Pt. Sur hydrophone array. As these signals propagate through the medium, they are modified and arrive at the receiver with a multi-path structure. This complex multi-path structure, unique to the range and depth of the source, forms the basis for achieving localization through matching model predictions to data.

Two areas of the array performance are assessed. The first involves an investigation into the detection ranges along both the "open" water and "along continental slope" radials from the array's location. The second area deals with the accuracy and robustness of linear, matched field processing schemes in localizing blue whale vocalizations.

## **C. OUTLINE**

The remainder of this thesis consists of three chapters. Chapter II contains a description of the approach. It describes the propagation model used to calculate

**Beamish and Mitchell (1971) Atlantic**

25 kHz                      theorized as zooplankton echolocation  
59.2 +/- 1 dB              source level  
  
vocalized while feeding, 5000 clicks heard

**Cummings and Thompson (1971b) Atlantic**

20, 25, 31.5 Hz            strongest components in the 1/3 octave band  
50, 63 Hz                  secondary components in the 1/3 octave band  
390 Hz                      one second pulse  
188 dB                      source level  
  
3 part sequence lasting 36.5 sec  
no behavior correlation  
6-169 m depth

**Cummings and Thompson (1994)**

17.5 Hz                    six spectral lines about 1.5 Hz apart lowest at 17.5 (1st part)  
19, 18, 17 Hz              call begins at 19 ,sweeps down in freq to 18 in first 3-4 secs  
                                 then held until last 5 sec, then down to 17 Hz (2nd part)  
  
19 sec duration of two part vocalization

**Clark and Fristrup (1995) Pacific and Atlantic**

50, 90 , 17.5 Hz          IUSS recorded Eastern Pacific Blue  
17.5 Hz                    IUSS recorded Western Atlantic Blue

**Thompson, Findley, Vidaland and Cummings (1996) Pacific**

17.8 Hz                    harmonically rich FM tone fundamental designated "B type" call  
53.4 Hz                    strongest component (third harmonic of "B" call) drops to 51 Hz  
                                 in the last 2 sec with median duration of 14.8 sec  
90 Hz                      AM tone demonstrating this band of energy as a fifth harmonic  
                                 designated "A type" call of median duration 12.2 sec (fundamental  
                                 frequency of 18 Hz)  
98-25 Hz                   short duration (1 sec) downward sweep with median frequency  
                                 modulation at 52.5 Hz

Table 1. Summary of pertinent blue whale vocalizations.

transmission loss and synthesize multi-path arrival structure. It also discusses the databases utilized in creating a Central Pacific Ocean model. The assessment of the detection ranges and localization performance uses these models. Chapter II also describes three linear processing schemes whose performance in localizing the blue whale calls is the thrust of this investigation. Chapter III provides a discussion of the modeling results pertaining to detection range and localization performance. Chapter IV presents the conclusions and recommendations.

## II. METHODOLOGY

### A. DETECTION RANGE ESTIMATION

#### 1. Environmental Model

The DBDB-5 bathymetric data provided by the Naval Oceanographic Office (NAVOCEANO) was utilized to provide an extensive domain for possible long range acoustic propagation of low frequency sounds. The bathymetry enclosed in a circle with a 700 km radius, centered at the array, was utilized. The database has a resolution of 5/60 of a degree in both latitude and longitude.

The array itself is situated on the down-slope of a submerged topographical feature known as the Sur Ridge. The depth of the array is approximately 1340 meters. A sector of 210 to 310 degrees true appears to be a long range, obstruction free view of the Pacific Basin. The Pioneer and Guide Seamounts exist to the north while the Davidson Seamount provides a small obstruction to the south. A contour plot of the bathymetry in the area of interest is illustrated in Figure 1. The bathymetry data for both an "open" water and "along continental slope" transect are displayed in Figure 2.

The sound speed profile (SSP) in the ocean model was derived from a 14-station CTD survey conducted by Collins et al. (1997) on board the *Research Vessel Pt Sur* in July of 1996. The stations were taken along a transect between Sur Ridge and the Pioneer Seamount. To establish a nominal profile for acoustic modeling, the SSPs were averaged together and passed through a canned cubic spline smoothing program in MATLAB to remove any large gradients due to fine structure which could result in numerical instability when tracing acoustic rays. The resultant profile is shown in



Figure 2.

A MATLAB program called *ray3d* (Chiu et al., 1994) was used to perform eigenray searches and compute signal amplitudes. Additionally, the program calculates travel times and phase shifts along the ray paths and generates multi-path arrival structure. The program requires root-mean-square (RMS) wave height, sediment density and sediment sound speed as inputs.

Pertinent documentation of the sediment was found in "Initial Reports of the Deep Sea Drilling Project, Vol. 18, site number 173". This publication documents the findings of the sediment characteristics found in 3000 m of water at approximately 100 km offshore of Cape Mendocino. The upper 140 m of sediment yields an approximate sound speed of 1600 m/s and a density of 1700 grams per cubic centimeter. From 140 m to 320 m, the sediment exhibits just a slightly increased density and sound speed. At 320 m below the sea floor, a thick basaltic layer is encountered.

Sea surface roughness data was obtained from the climatological database of the Naval Pacific Meteorology and Oceanography Center (NAVPACMETOCCEN). A value of 1.84 m (6.025 ft) was calculated as a mean wave height for the entire year with a standard deviation of 0.129 m (0.424 ft). In order to input this information into *ray3d*, the annual mean wave height was converted to RMS wave height.

## **2. Acoustic Propagation Model**

As a whale vocalizes at a distance from the array, the sound arrives at the receiver via a multitude of possible ray paths. The Hamiltonian Acoustic Ray-Tracing Program for the Ocean (HARPO) was used to calculate these ray paths. By numerical integration

of the Hamilton's Equations, this program traces the paths of acoustic rays as they travel through an analytic model ocean. The original version of this program (Jones et al., 1986) was upgraded in 1994 (Chiu et al., 1994) to allow for the input of gridded bathymetry and sound speed data. The upgraded program was used in this study.

Invoking acoustic reciprocity, a vertical "fan" of acoustic rays were launched from the Pt Sur array. Rays with initial elevation angles from -3 to 30 degrees were traced. The limits of the launch angles were selected based on the bottom slope at Sur Ridge and the critical angle associated with water-sediment interface. Rays unimpeded by the bottom slope near Sur Ridge, with angles less than critical at the sea floor, or that turn before reaching the bottom were allowed to cycle through the model ocean. As stated earlier, eigenray extraction and arrival structure calculations are accomplished by *ray3d*. Once identified, the eigenray's signal amplitude  $b_n$ , phase shift  $\Phi_n$  and travel time  $t_n$ , are computed. A coherent sum of the multi-path contributions then gives the predicted receive signal. Given the complex envelope of the source signal  $s(t)$ , the complex envelope of the predicted receive signals is

$$r(t) = \sum_{n=1}^N s(t-t_n) b_n e^{-i[2\pi f_0(t-t_n) + \Phi_n]} \quad (1),$$

where  $N$  is the number of eigenrays and  $f_0$  is the carrier frequency of the source signal.

For a unit amplitude tone transmitted at a frequency of  $f_0$ ,  $s(t)$  is constant in time. Therefore, the transmission loss, TL, is

$$TL = -10 \log (r r^*) \quad (2),$$

with

$$r = \sum_{n=1}^N b_n e^{-i[2\pi f(t-t_n) + \Phi_n]} \quad (3)$$

and where the \* symbol used in Equation (2) denotes the complex conjugate.

The transmission losses calculated at 17, 51 and 90 Hz, respectively, along both “open” water and “along continental slope” transects are shown in Figure 3. The “open” water radial is oriented on a 230 degree True azimuth from the array, while the “along continental slope” radial was directed towards the Farallon Islands to the north. For each transect, the only appreciable difference between the transmission loss curves at the frequencies of interest is attributed to the frequency dependent effects of surface scattering and bottom interaction.

### 3. Figure of Merit Estimate

An estimate for omnidirectional noise was obtained from the Tactical Environmental Simulation System (TESS) available at the Naval Postgraduate School. Given the input parameters of time of year and location, TESS provides an output of ambient noise level. A late summer profile revealed an omnidirectional level of 75 dB re 1  $\mu\text{Pa}^2/\text{Hz}$ . The summer profile was chosen due to the arrival of the blue whales to the Monterey area in late summer.

The beamforming capability of the array allows for a reduction of the

omnidirectional noise level. An estimate of the array gain AG is

$$\begin{aligned} \text{AG} &= -10 \log (\text{horizontal beamwidth} / 360 \text{ degrees}) \\ &= -10 \log (10 / 360) = 15.6 \text{ dB} \end{aligned} \quad (4),$$

where the 10 degree horizontal beamwidth is an average for all the bearings. Application of this array gain number provides a significant 15.6 dB reduction in noise.

In order to estimate the maximum detection ranges along the different radials, it is necessary to establish a figure of merit (FOM) estimate. Therefore, FOM is

$$\begin{aligned} \text{FOM} &= \text{SL} - (\text{AN} + 10 \log \Delta f - \text{AG}) \\ &= 175 - (75 + 10 - 15.6) = 105.6 \text{ dB} \end{aligned} \quad (5),$$

where SL is the source level,  $\Delta f$  is the bandwidth of the signal and AN is the omnidirectional ambient noise level. The SL estimate of 175 dB re 1  $\mu\text{Pa}$  is a "low end" estimate obtained by the authors referenced in Table 1. Of the three signals utilized for this study, the 90 Hz signal has the largest bandwidth. Estimated at 10 Hz, this bandwidth was chosen to provide the most conservative FOM estimate. By applying the result of (5) to the transmission loss curves, a maximum detection range estimate can be obtained.

## B. LOCALIZATION PERFORMANCE SIMULATION

### 1. Signal Models

An underwater recording made by the Cornell University Lab of Ornithology (Charif, pers comm., 1997) was utilized to simulate the source signals. The data was recorded on the *Research Vessel Cory Chouest* in September 1995 and sampled at 400 Hz. This vocalizing whale was sighted off the coast of southern California at approximately 1 AM local time. A spectrograph of the recording is illustrated in Figure 4. The vocalizations presented in the spectrograph match the frequency structure and duration reported in the existing literature. This further suggests that low frequency blue whale calls are strikingly invariant throughout the Atlantic and Pacific Oceans and from one blue whale to the other.

Two recognizable "calls" from the recording can be identified. The first call, designated the A call, manifests itself as a pulsing amplitude modulated tone of approximately 17.5 second duration centered around 90 Hz. The second, the B call, is present as a frequency modulated down sweep with a 17 to 18.5 Hz fundamental lasting approximately 15 seconds. The third harmonic of this down sweep, centered around 51 Hz, dominates.

In order to synthesize the receive signals using *ray3d*, it is necessary to provide the complex envelopes of the animal's vocalizations. For this reason, signals associated with the 17, 51 and 90 Hz blue whale calls were extracted from the recording and bandpass filtered. A complex demodulation of each of these signals was conducted and resulted in baseband complex envelopes for each. The magnitude of these envelopes are

shown in Figure 5. These near-field signals were taken to be the source signals.

A visual illustration of the synthesis of the received signal at two different source locations is given in Figure 6. Both the relative magnitudes of the arrival structure of the 17 Hz signal and the associated eigenray magnitude-time structures are shown. The distortion of the source signal in the arrival structure is due to the multiple eigenrays that scale and delay the source signal differently, causing interferences when combined. The signal distortion is generally different for different source locations and this is the basis of any model-based localization algorithm.

## **2. Localization Algorithm and Test Procedure**

Since the bearing can be determined by conventional plane wave beamforming using the horizontal array, the major concern is whether or not accurate and robust range and depth estimates of a vocalizing blue whale can be obtained. To address this question, a "virtual" blue whale was placed in the ocean model at a designated range and depth from the array on an open water bearing of 230 degrees True. The transmissions of the 90-Hz A call, the 17-Hz B call and the 51-Hz B-call harmonic were simulated using the source signal and propagation models previously described. The simulated range and depth of the blue whale and the simulated arrival structure at the array were then used to represent the "true location" and "data," respectively, in modeling the localization performance.

The resolution, accuracy and robustness to noise of three different time-domain Bartlett-type localization algorithms (Clay, 1987; Miller and Chiu, 1992; Miller et al., 1996) applying to each of the signals, were studied and contrasted. Each algorithm is

based on a linear correlation between a certain property of the observed signal (i.e., data) and the predicted (i.e., modeled) signal property for a number of possible source locations in a range-depth grid. The collection of the maxima of the normalized correlation functions associated with the different tried locations produces the so-called ambiguity surface (Tolstoy, 1993).

The global maximum of the ambiguity surface is the "best" estimate of the blue whale's range and depth, its horizontal and vertical dimensions define the footprint, and distant peaks of significant heights are potential false targets. Therefore, studying the behavior of this ambiguity surface, in particular, how it changes with a different algorithm, a different signal type and a different signal-to-noise ratio (SNR) in the data, is central to the assessment of localization performance. The difference between the estimate and the controlled true location is a measure of accuracy. The size of the footprint is a measure of resolution. The heights and number of the distant peaks measure ambiguity. While finally, the changes in all of the above measures with controlled decreases of SNR are directly related to robustness.

The first localization algorithm being investigated is a fully-coherent scheme involving cross-correlations between the complex envelopes of the observed and predicted signals (hereafter referred to as "coherent matching"). The remaining two algorithms are incoherent schemes. For the cross-correlations, the second algorithm uses the magnitude of the complex envelope (hereafter referred as "magnitude matching"), whereas the last algorithm employs the square of the signal envelope (hereafter referred as "power matching"). Mathematically, the correlation functions associated with coherent,

magnitude and power matching are, respectively,

$$C_{coherent}(\tau) = \frac{\int_{-\infty}^{\infty} r_D(t) r_M^*(t+\tau) dt}{\sqrt{\int_{-\infty}^{\infty} r_D^2(t) dt} \sqrt{\int_{-\infty}^{\infty} r_M^2(t) dt}} \quad (6),$$

$$C_{magnitude}(\tau) = \frac{\int_{-\infty}^{\infty} |r_D(t)| |r_M^*(t+\tau)| dt}{\sqrt{\int_{-\infty}^{\infty} r_D^2(t) dt} \sqrt{\int_{-\infty}^{\infty} r_M^2(t) dt}} \quad (7) \text{ and}$$

$$C_{power}(\tau) = \frac{\int_{-\infty}^{\infty} |r_D(t)|^2 |r_M^*(t+\tau)|^2 dt}{\sqrt{\int_{-\infty}^{\infty} r_D^4(t) dt} \sqrt{\int_{-\infty}^{\infty} r_M^4(t) dt}} \quad (8),$$

where  $r_D$  is the complex envelope of the observed (data) arrival structure and  $r_M$  is the complex envelope of the predicted (model) arrival structure.

In the investigation of footprint sizes, a small search grid of 1 km in range (50 - 51 km from the array) by 125 m in depth (25 - 150 m) but with densely spaced grid points was used. The vocalizing whale was positioned at a depth of 115 meters and a range of 50.5 km from the array. The simulation of footprints not only helps to quantify and contrast the resolutions of the different algorithms for different types of calls, but also provides vital information for the design of an optimal search grid for a real application. There is, of course, a trade-off between resolution and computational efficiency. In order



to expedite an investigation of potential distant false targets which might introduce difficulties in obtaining an unambiguous location estimate, coarse spacings of 0.2 km in range and 25 m in depth were used to occupy a large search grid covering ranges from 25 to 75 km and depths from 25 to 150 m. It is fully recognized that this coarse search grid is not adequate for a real application of locating blue whales. However, it is suitable for a quick analysis pertaining to distant false targets.

### III. ANALYSIS AND RESULTS

#### A. DETECTION RANGE

Application of the FOM value calculated in (6) to all the “open” water coherent transmission loss curves yields a range estimate of at least 500 km. The “along continental slope” detection ranges appear bounded only by the coastline. As would be expected, the 17 Hz signal appears to experience the least transmission loss along the “open” water transect, yet all three of the signals appear to trend equally with distance from the array. A critical FOM value of approximately 85 dB, representing a threshold for detection of the blue whale calls in ranges greater than 200 km, can be visualized in Figure 4.

The source level contributes to the variability of this critical FOM value. A “conservative value” of 175 dB re 1  $\mu$ Pa was utilized in estimating the ranges. Similar calls recorded by the *Research Vessel Cory Chouest* in 1994 (one year prior to the recording used in this thesis) established a source level of 184 dB re 1  $\mu$ Pa (Charif, pers comm., 1997). This source level estimate is just four decibels short of a 1971 estimate of 188 dB re 1  $\mu$ Pa (Cummings et al., 1971). Any increase in the source level from 175 dB re 1  $\mu$ Pa would further extend these already long detection ranges.

#### B. LOCALIZATION PERFORMANCE

##### 1. Footprint

As stated earlier, the size of the footprint for each of the three signals provides a measurement of resolution. As the footprint increases in size, both ability to resolve multiple whales vocalizing at the same time and the required minimum grid spacing

increase. The approximate dimensions, in meters, of the footprints are listed in Table 2.

<u>Frequency</u> (Hz)	<u>Horizontal</u> (m)	<u>Vertical</u> (m)
17	300	60
51	150	20
90	50	5

Table 2. Horizontal and vertical dimensions of the footprints for each signal

The 17 Hz portion of the B call exhibits the largest acoustic footprint of the three signals studied. The footprint size, however, decreases rapidly as frequency increases. The optimal spacing for the localization grid for real applications should be half the size of the smallest footprint (i.e., 25 m in range and 2.5 m in depth). This dimension approaches the actual length of the animal and could provide the resolution needed to distinguish between whales vocalizing simultaneously at a distance of one grid spacing apart.

## **2. False Targets**

The presence of high distant peaks in a localization grid is indicative of “false targets” and is directly related to the ability of an algorithm to localize unambiguously. The goal, of course, is to select an algorithm that exhibits the highest contrast between the distant peaks and the peak at the true location in the ambiguity surface. The ambiguity surfaces calculated over a large area for each of the three matching algorithms are shown in Figures 10-12. Although the magnitude matching scheme for the 17 Hz signal lacks the side lobes that are present in the coherent and power matching (see Figure 10) at 43

and 60 km of range, the overall results, including the considerations of both the 51 and 90 Hz ambiguity surfaces (see Figures 11 and 12), illustrate that the best choice for an unambiguous estimate would be the coherent matching algorithm.

### **3. Effects of White Noise**

When gaussian white noise is introduced into the signal to systematically change the signal to noise ratio (SNR), the degradation of localization performance due to random fluctuations can be evaluated. Two quotient measures were used to quantify the degradation as SNR increases. The first quotient was the actual peak divided by the largest side lobe peak. The second quotient was the actual peak divided by the mean of the top ten side lobe peaks. It is important to note that side lobe peaks existed outside of the dimensions of the respective signal footprint. Figures 13 and 14 illustrate the computed degradation curves for the 17 and 51 Hz signals as a function of SNR. The curves for the 90 Hz signal curves are nearly identical to the 51 Hz curves and thus they are not shown. Using these curves, localization thresholds can be established.

A localization threshold can be defined as the SNR beyond which the two quotients remain larger than unity. Logically, if the maxima of the normalized model-data correlation functions associated with the false targets exceeded the maximum at the actual position of the vocalizing whale, the ratio or quotient would be less than one. In view of Figure 13, the localization of the 17 Hz signal does appear to be sensitive to white noise and requires at least 2 dB SNR, depending on the algorithm used, to ensure localization. As SNR increases past this critical value, all three algorithms appear to be quite robust for the 17 Hz signal.

Figure 14 shows the degradation curves for the 51 Hz signal. For this signal, all three algorithms appear quite SNR independent and strongly robust. Almost all quotient values remain greater to one from 0 to 20 dB SNR. Considering the computed degradation curves shown in Figures 13 and 14, the coherent matching scheme appears to be the most robust in noise-present environment.

#### IV. CONCLUSIONS

This thesis has attempted to model the performance of the Pt Sur hydrophone array in localizing blue whales. It is important to note that this study provides only a "first order" estimate of the array's ability to provide an accurate estimate of a whale's position. Based upon the results, however, the potential for actual localization using the array appears promising. Detection ranges along "open" water transects were estimated to be greater than 500 km and bounded only by the coastline for "along continental slope" transects. Among the three model-data correlation algorithms assessed, the coherent matching was found to provide the highest resolution and the most unambiguous position estimate. Additionally, the coherent matching scheme was found to provide the highest degree of robustness in the presence of white noise for each of the three signals.

The range-depth localization grid used in this performance study were oriented along a 230 degree True azimuth from the array in order to investigate possible long range Pacific basin localization. The late summer arrival of the blue whales into the Monterey area, however, often brings the animals close to shore. The whales frequent the 200 - 500 fathom isobaths as they feed upon the krill patches that bloom in the nutrient rich upwelled water. The array's orientation may or may not prohibit localization as these animals linger over the continental slope south of the Farallon Islands or venture into the Monterey submarine Canyon. The array's performance in localizing in these near shore regions has yet to be investigated.

The obvious next step would be to test the localization algorithms with actual blue whale calls detected by the array. A large area localization grid utilizing a horizontal

spacing of 25 m and 2.5 m in depth, as determined by the footprint study, is required. A number of factors can pose additional challenges to this task. They include; signal mismatches, multiple animal vocalizations and near shore transmission of the signal. The latter of these topics is beyond the scope of this study.

Signal mismatching can easily occur due to the variability, though small, of the animal's vocalization. Although the "calls" appear standard in the Eastern Pacific region, documentation of acoustic variability is not as well documented as pigmentation variability, which serves as a visual identification of individuals (Calambokodis and Barlow, 1995). Localizing multiple animals that are vocalizing within a group presents yet another challenge. Luckily, of the balaenopterids that do vocalize, the blue whale is more apt to be found alone or in groups of 1- 4. (Calambokodis and Barlow, 1995) As stated earlier, dedicated cataloging of individual vocalizations may greatly assist in this challenge. Further study into each of these topics is needed.

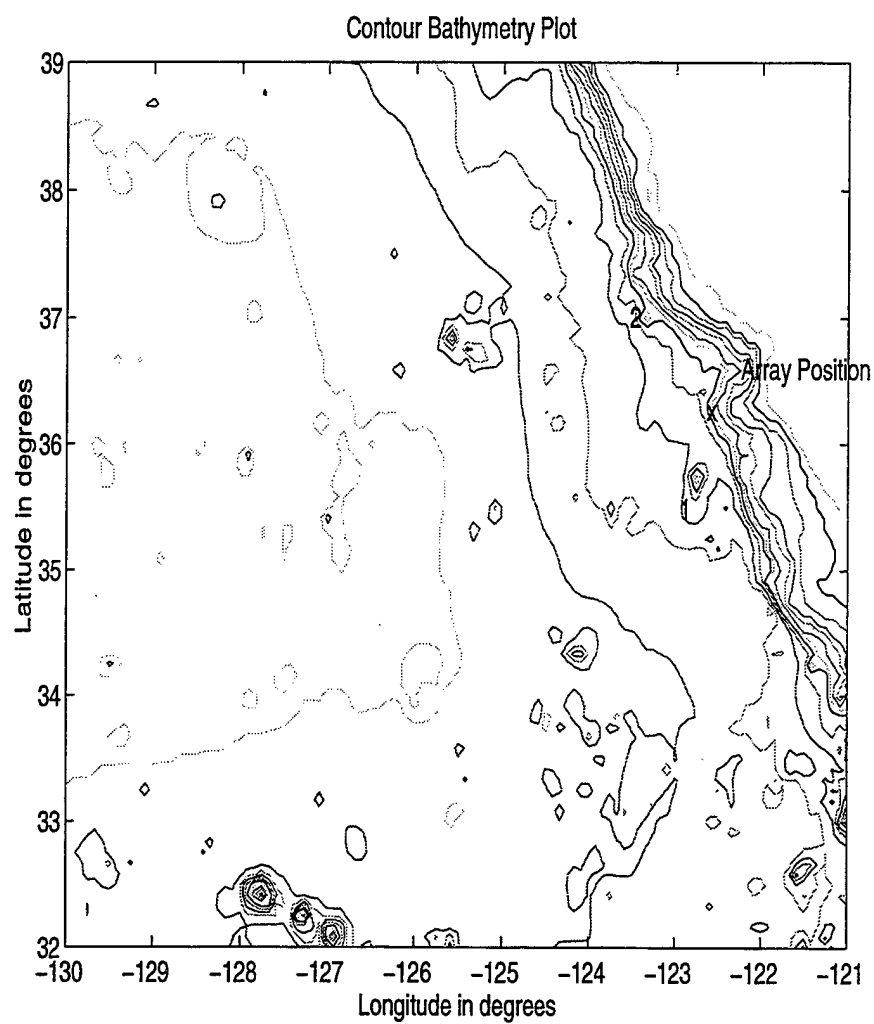


Figure 1. Bathymetry for the Central Eastern Pacific. The "x" indicates the location of the hydrophone array. The Davidson Sea mount is located at position 1, while the Pioneer and Guide Sea mounts are located at position 2. Contour interval is approximately 350 meters.



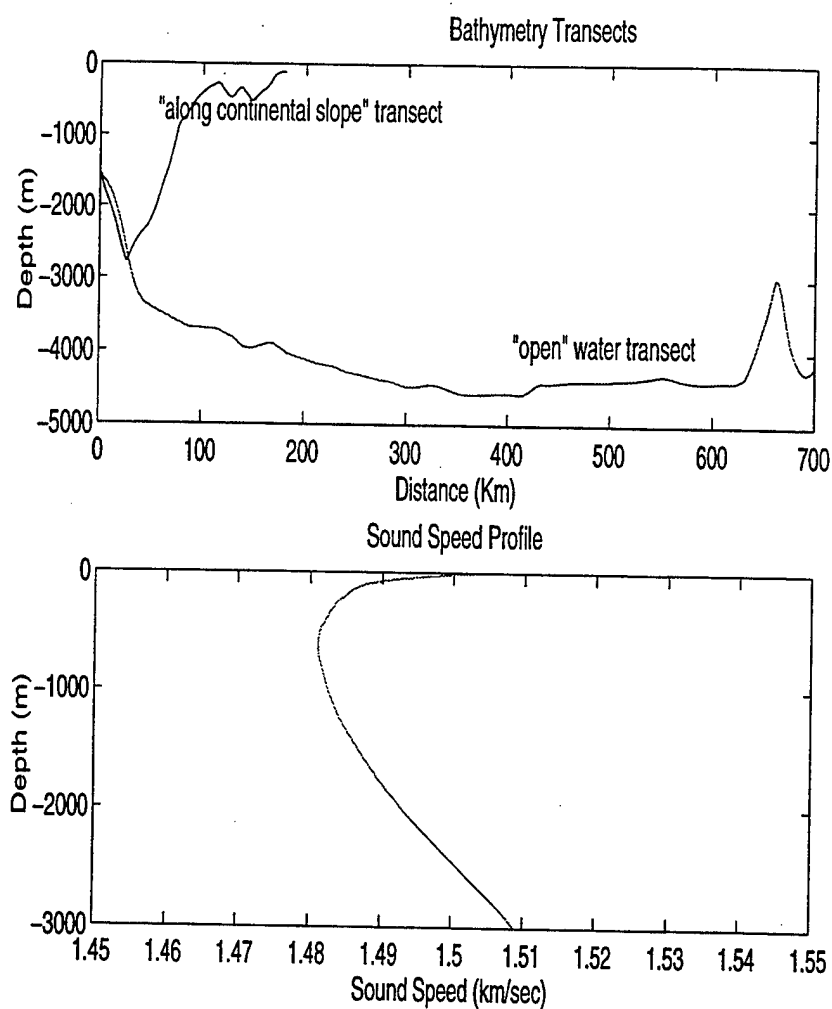


Figure 2. Sound speed profile and bathymetry along two different radials. The top panel illustrates both the "along continental slope" transect, which is oriented towards the Farallon Islands, and the "open" water transect, which is oriented 230 degrees True. Both transects originate from the array's position. The bottom panel illustrates a nominal sound speed profile.

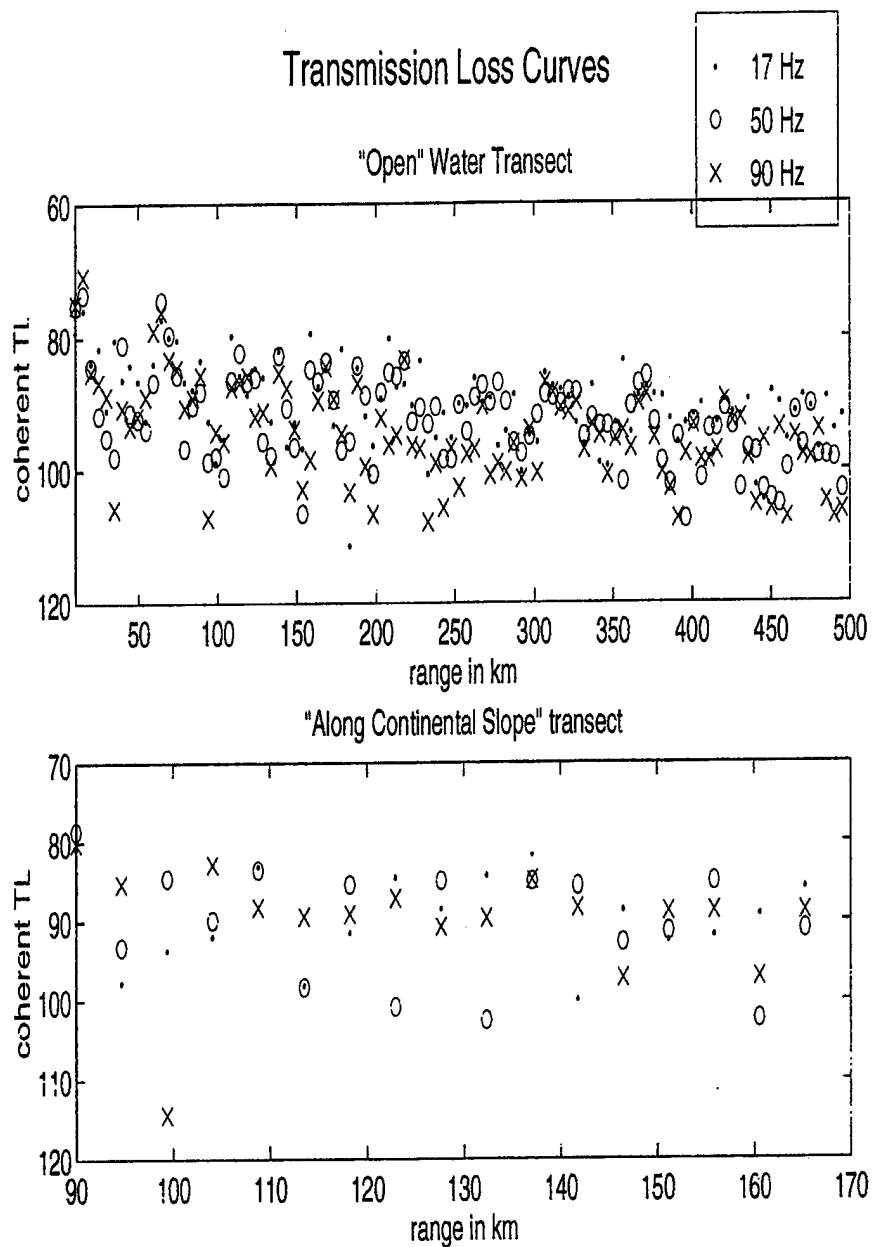


Figure 3. Transmission loss curves for both the "open" water (230 degrees True from the array) and the "along continental slope" (towards the Farallon Islands) transects.

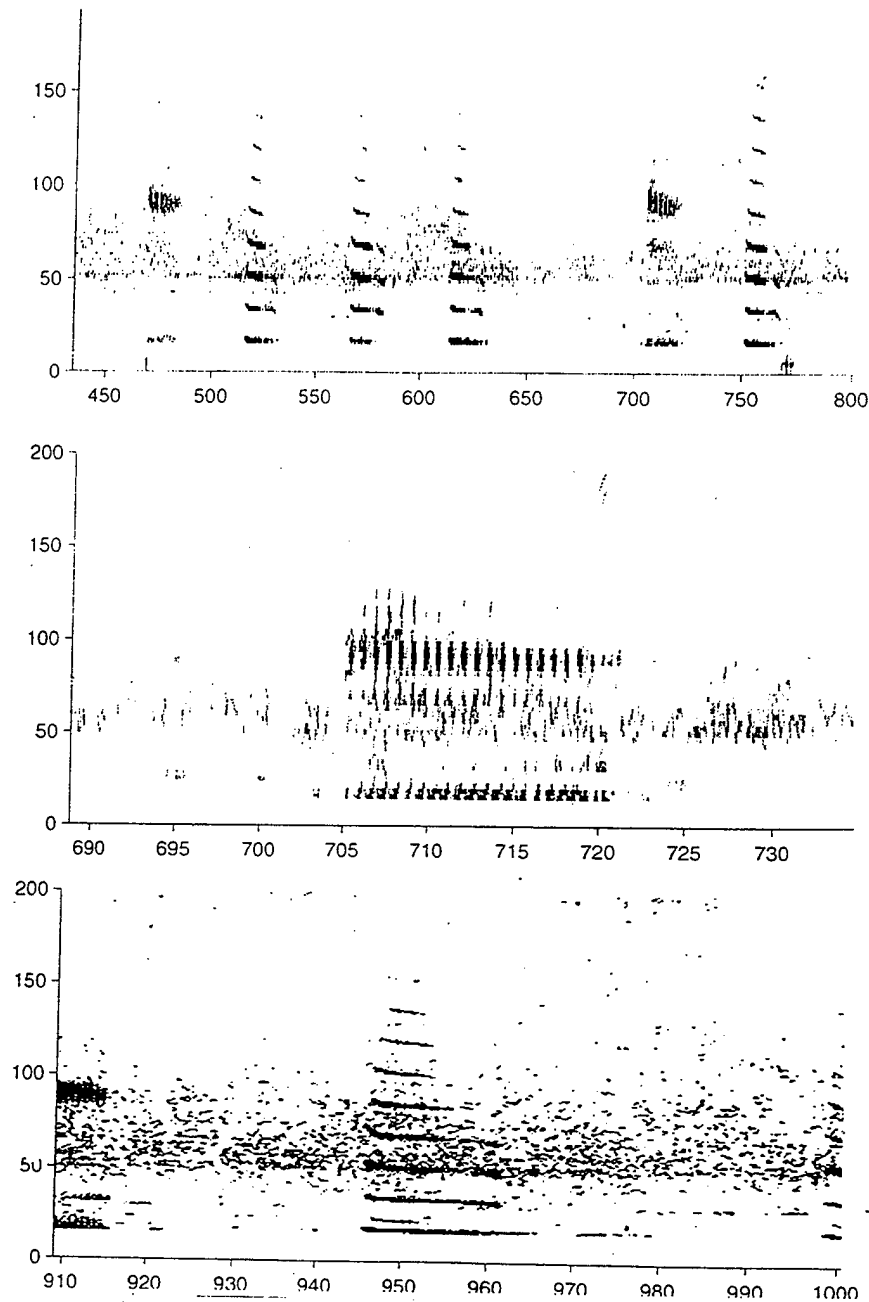


Figure 4. Lofar spectrogram of blue whale vocalizations. The top spectrogram is an A-B-B-B-A-B sequence. The middle spectrogram shows the pulsing structure of the A call which lasts approximately 17.5 seconds. The bottom spectrogram demonstrates the downsweep of the B call, harmonically rich in this example, which lasts approximately 15 seconds. The vertical axis is frequency while the horizontal axis is time index, in seconds, from the beginning of the recording (modified from Charif, 1997).

### Complex Envelopes of the 3 primary calls

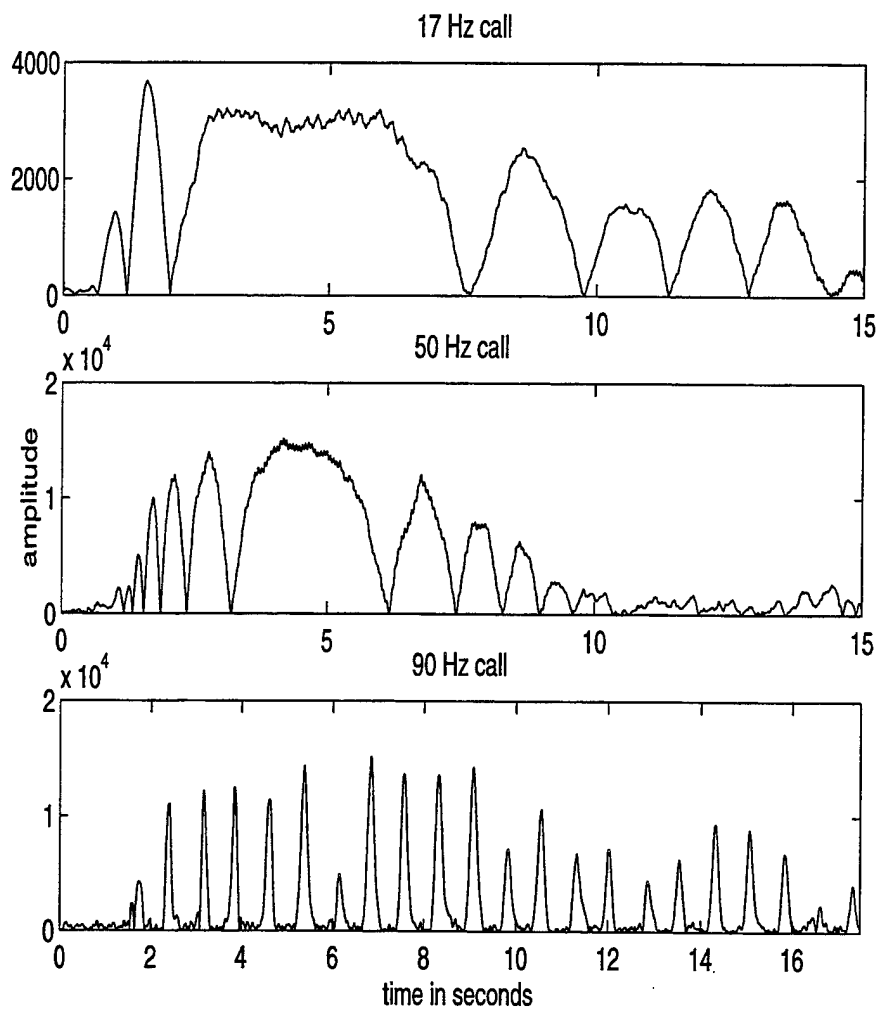


Figure 5. Relative magnitude of the complex envelopes of each of the three source signals.

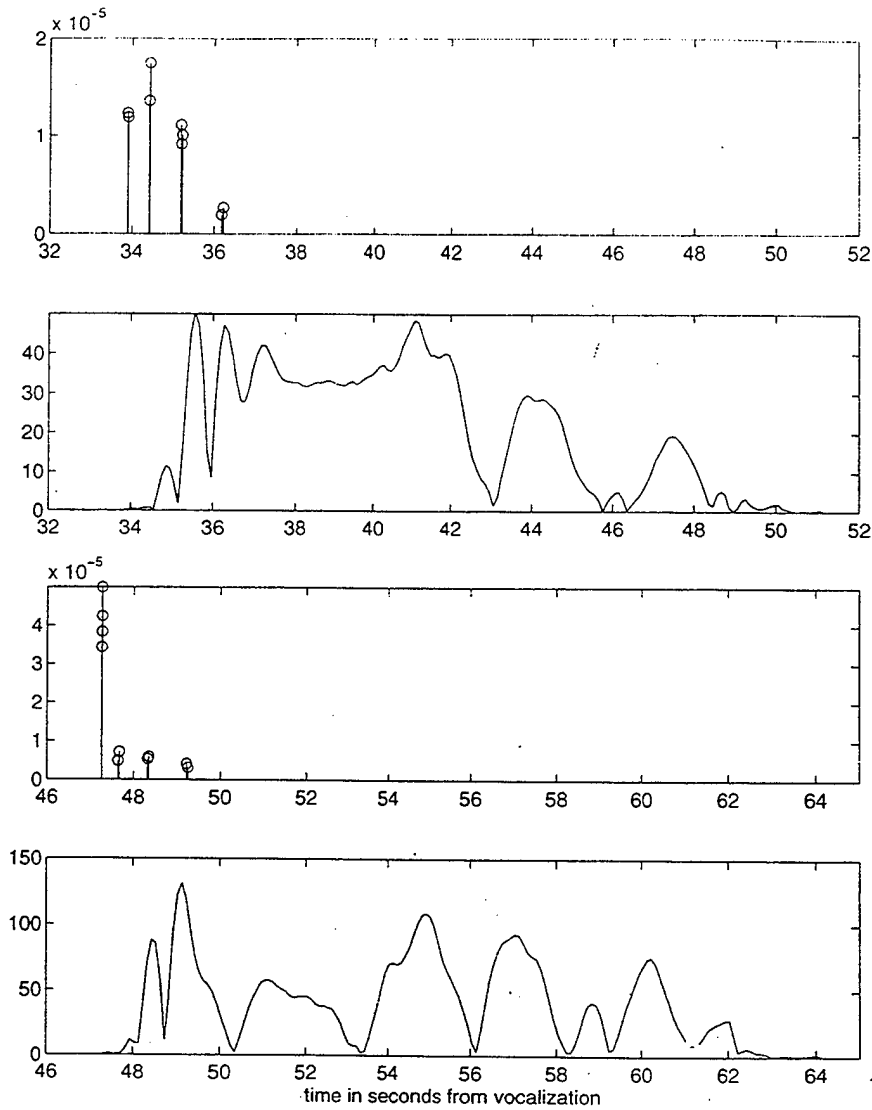


Figure 6. Simulated eigenray magnitude-time structure and the envelope of the associated arrival pattern for the 17 Hz signal for two different whale locations. The top two panels are for a source location of 50 km in range and 120 m in depth. The bottom two panels are for a source location of 70 km in range and 120 m in depth. All ranges and depths are from the hydrophone array.

2D Magnitude Matching Footprint for 17 Hz signal

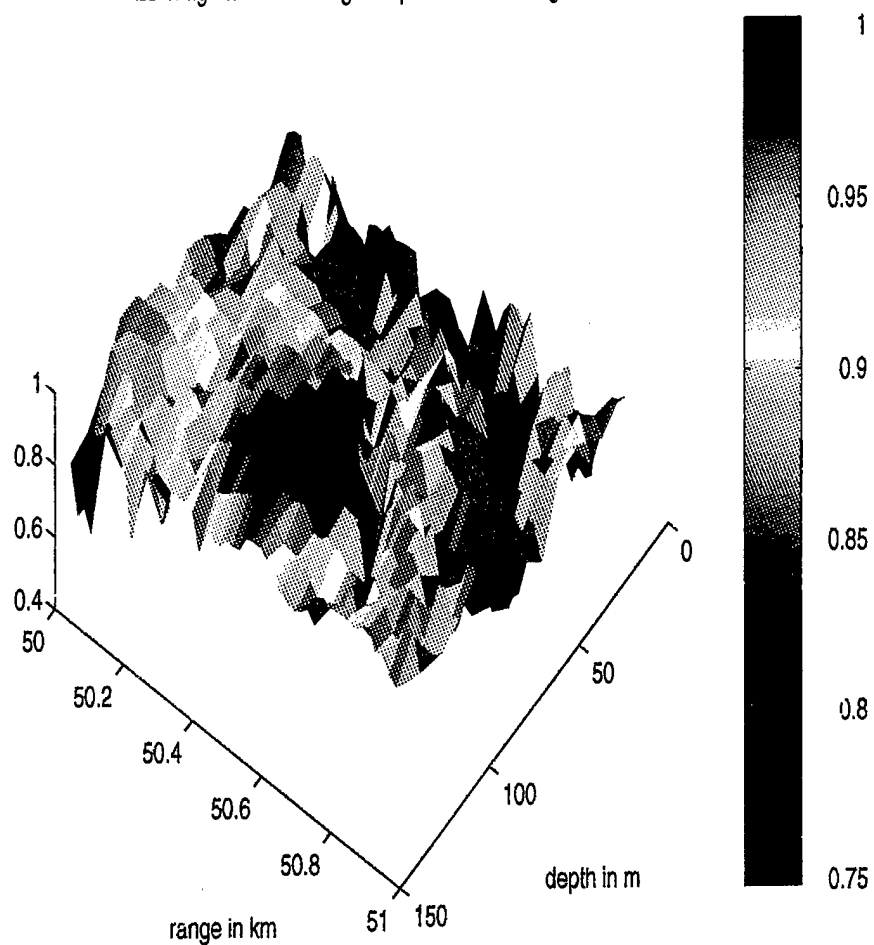


Figure 7. Surface elevation plot of the ambiguity surface produced by the magnitude matching scheme for the 17 Hz signal.

2D Magnitude Matching Footprint for 51 Hz signal

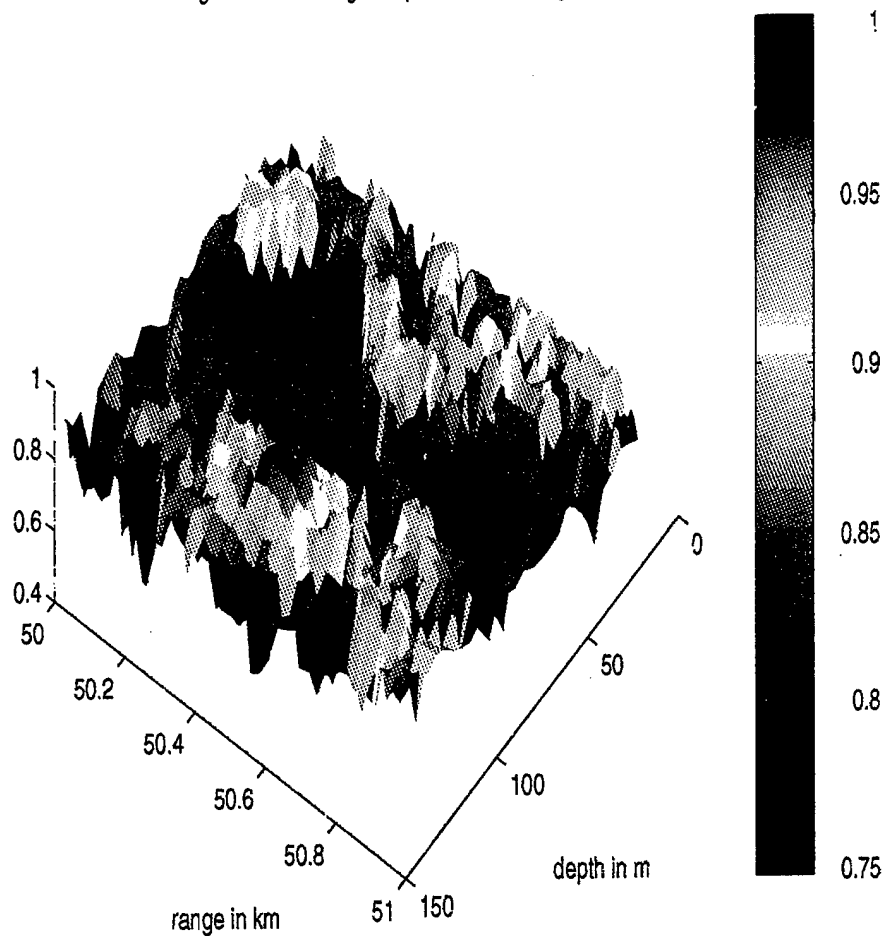


Figure 8. Surface elevation plot of the ambiguity surface produced by the magnitude matching scheme for the 51 Hz signal.

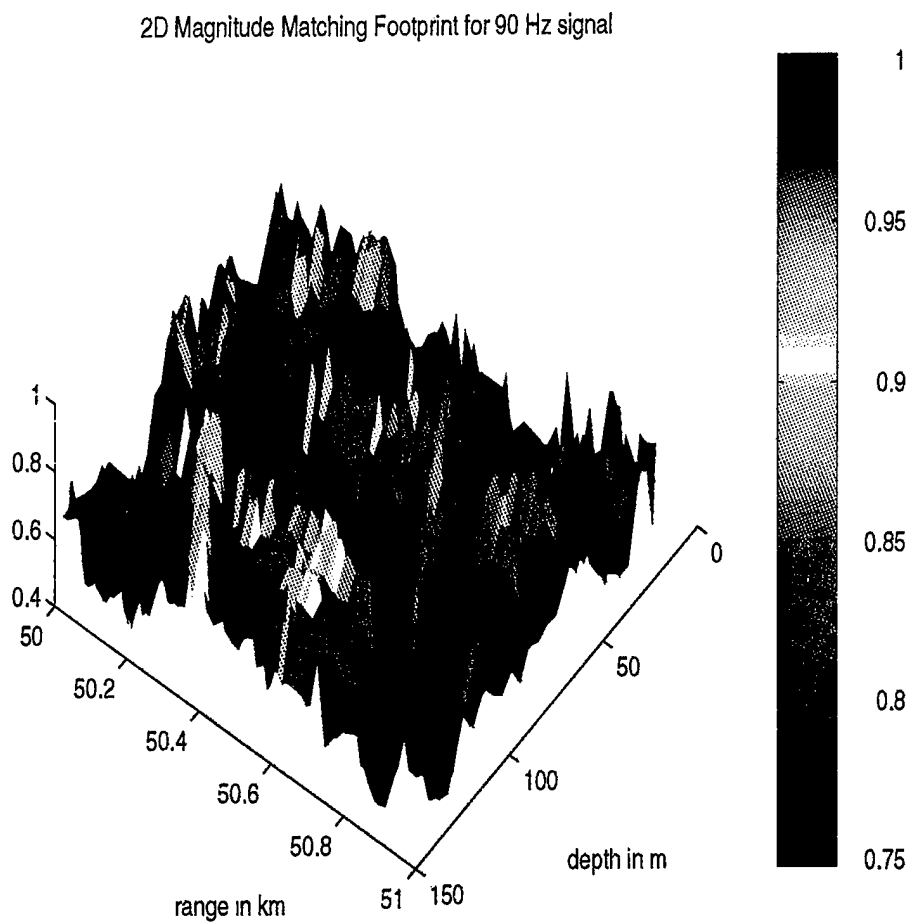


Figure 9. Surface elevation plot of the ambiguity surface produced by the magnitude matching scheme for the 17 Hz signal.



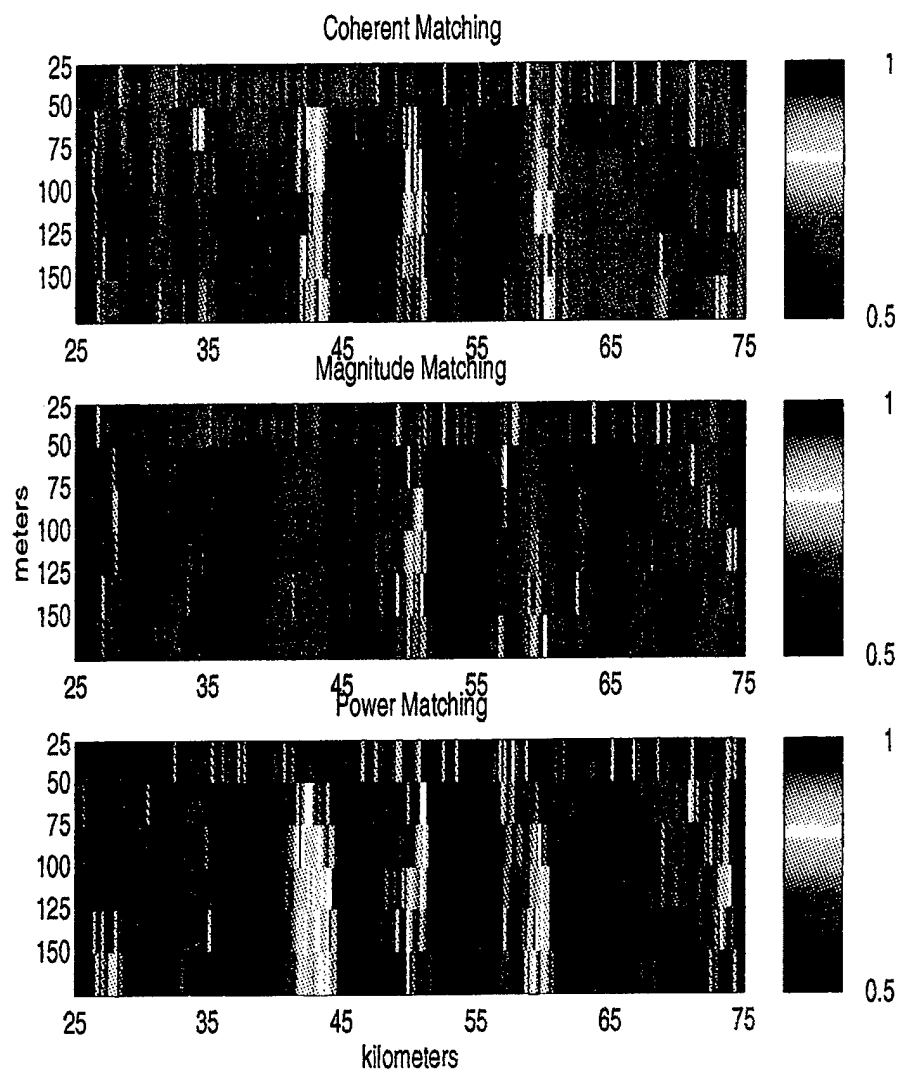


Figure 10. Large-area ambiguity surface for the 17 Hz signal. The source is located at a range of 50 km and depth of 75 m.

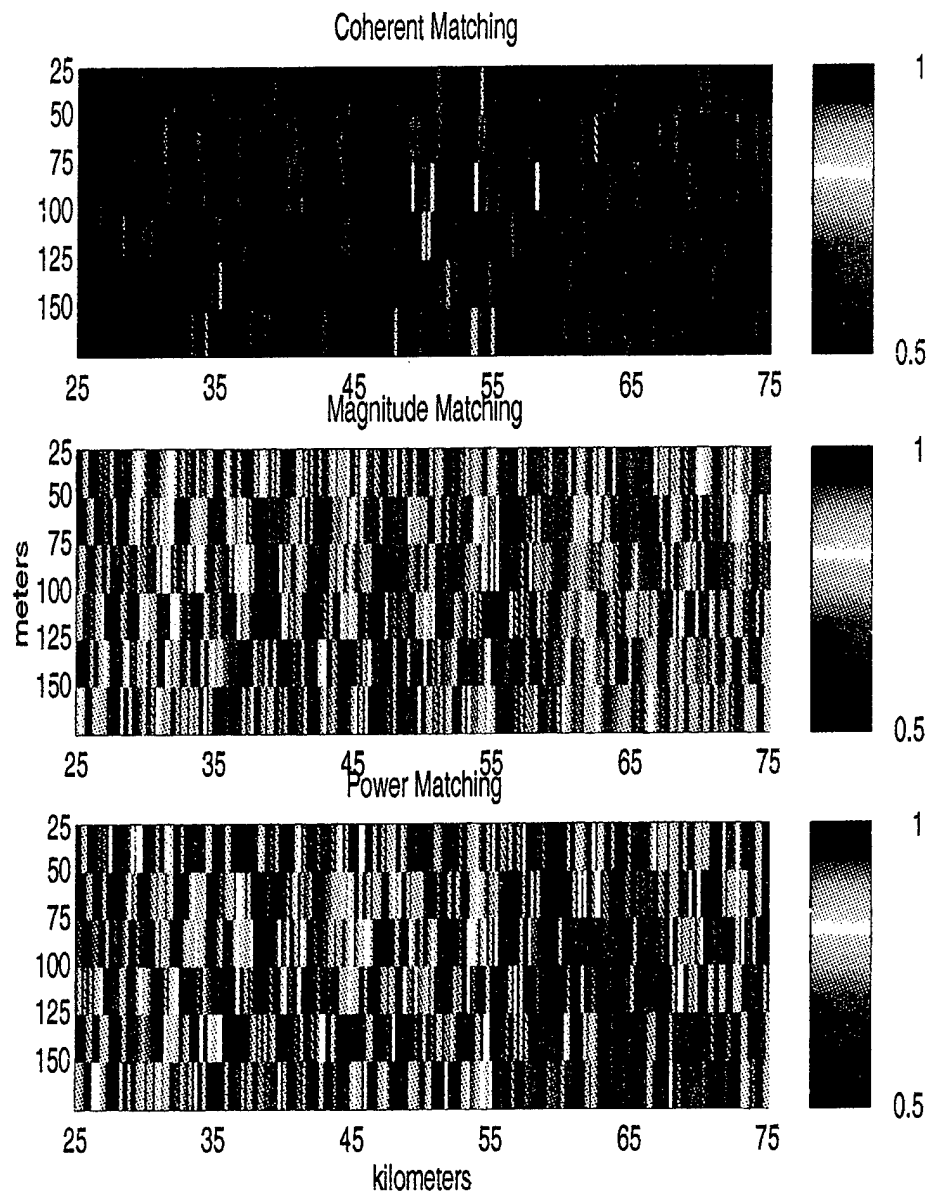


Figure 11. Large-area ambiguity surface for the 51 Hz signal. The source is located at a range of 50 km and a depth of 75 m.

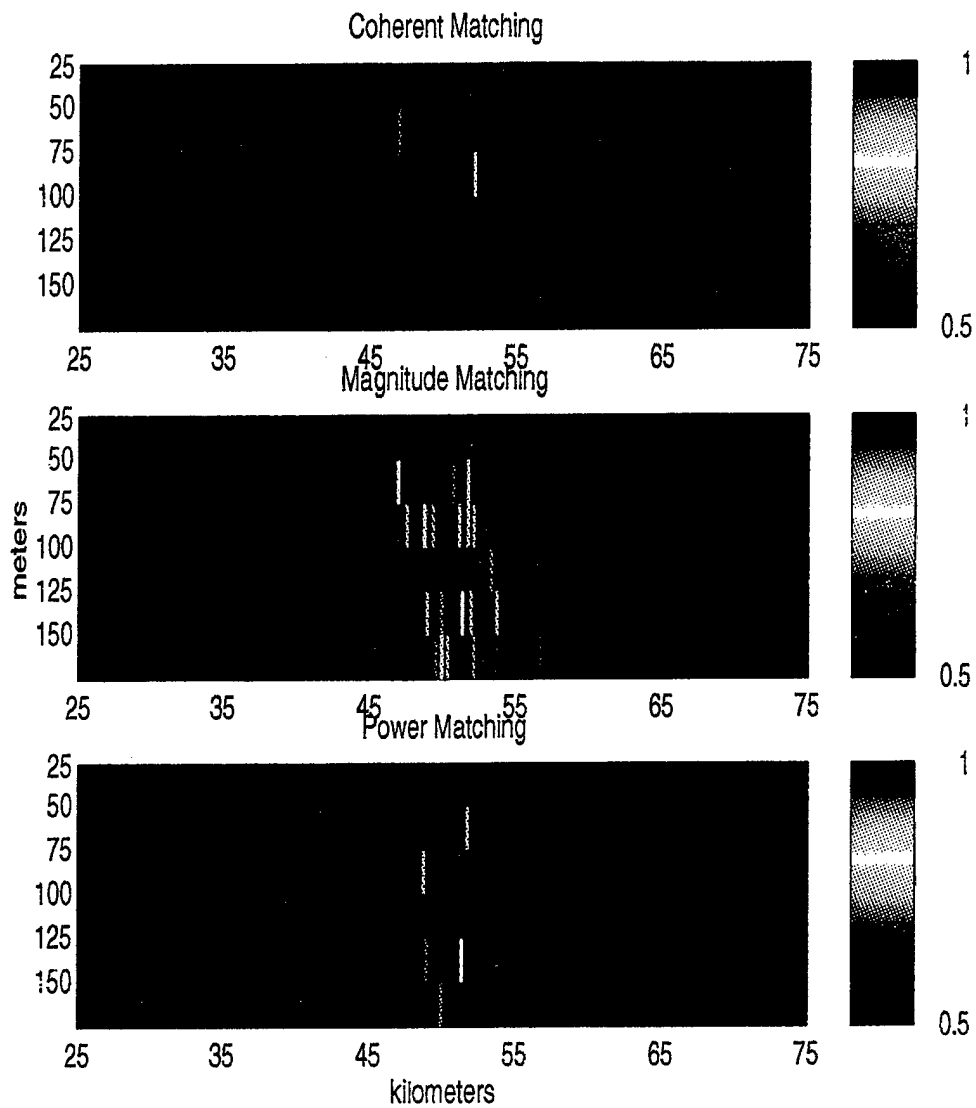


Figure 12. Large-area ambiguity surface for the 90 Hz signal. The source is located at a range of 50 km and a depth of 75 m.

## Localization Threshold Analysis – 17 Hz

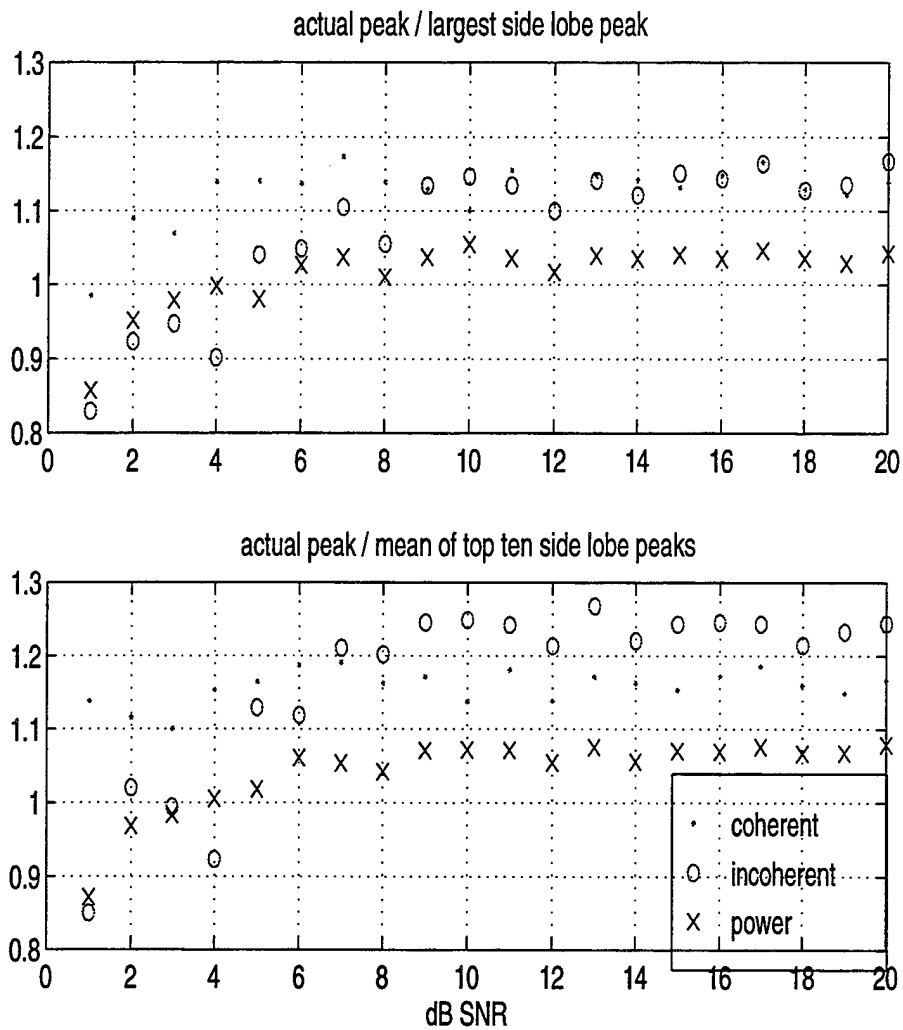


Figure 13. Localization degradation as a function of SNR for the 17 Hz signal. Two quotients are used to quantify the effect of added noise to each algorithm.

### Localization Threshold Analysis – 51 Hz

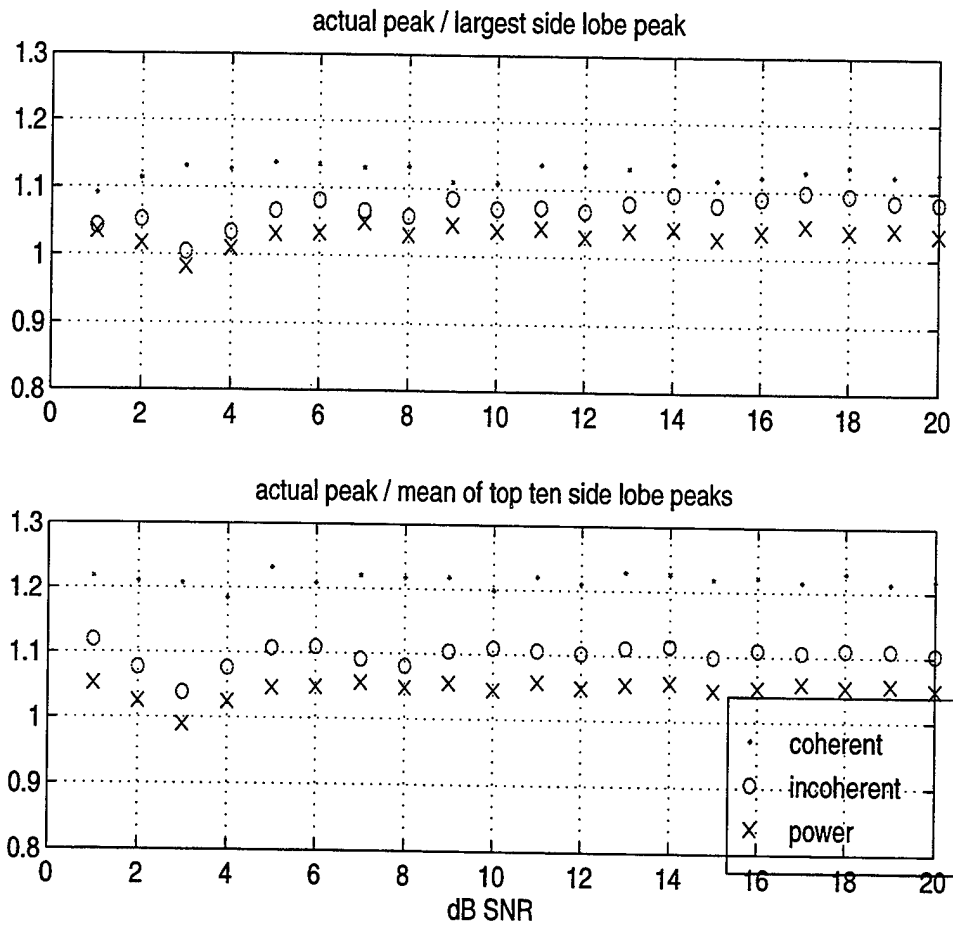


Figure 14. Localization degradation as a function of SNR for the 51 Hz signal. Two quotients are used to quantify the effect of added noise to each algorithm.

## LIST OF REFERENCES

- Beamish, P. and E. Mitchell, 1971. "Ultrasonic sounds recorded in the presence of a blue whale, *Balaenoptera musculus*," *Deep-Sea Research*, 18:803-809.
- Calambokidis, J. and G. Steiger, 1995. *Blue Whale*, Voyager Press, Hong Kong, 72 pp.
- Charif, R., Bioacoustics Research Program, Cornell Lab of Ornithology, Ithaca, NY, personal communication, 1997.
- Chiu, C.-S., A. J. Semtner, C. M. Ort, J. H. Miller and L. L. Ehret, 1994. "A ray variability analysis of sound transmission from Heard Island to California," *Journal of the Acoustical Society of America*, 96:2380-2388.
- Clark, C. W., 1990. "Acoustic behavior of mysticete whales," in Thomas, J. and R. Kastelein, eds, *Sensory Abilities of Cetaceans*. Plenum Press, NY, pp 571-583.
- Clark, C. W. and W. T. Ellison. 1993. "Bioacoustics of baleen whales: From infrasonics to complex songs," *Journal of the Acoustical Society of America*, 94:1830 (A).
- Clark, C. W., 1994. "Blue deep voices: Insights from the Navy Whales 93 program," *Whalewatcher, J. Am. Cetacean Soc.*:6-11.
- Clark, C. W. And K. M. Fristrup, 1995. "Whales '95: A Combined Visual and Acoustic Survey of Blue and Fin Whales off Southern California," unpublished report.
- Clay, C. S., 1987. "Optimum time domain signal transmission and source localization in a waveguide," *Journal of the Acoustical Society of America*, 81:660-664.
- Collins, C., T. A. Rago and J. Steger, 1997. "Hydrographic Data Along the California Coast from Pigeon Point to Cape San Martin, May through July 1996," *Tech Rpt NPS-OC-97-002*, Naval Postgraduate School, Monterey, CA.
- Cummings, W. C., J. F. Fish, P. O. Thompson and J. R. Jehl, Jr., 1971. "Bioacoustics of marine mammals off Argentina: R/V Hero cruise 71- 3," *Antarctic Journal*, November-December:266-268.
- Cummings, W. C. and P. O. Thompson, 1971a. "Bioacoustics of marine mammals; R/V Hero cruise 70-3," *Antarctic Journal*, September-October:158-160.
- Cummings, W. C. and P. O. Thompson, 1971b. "Underwater sounds from the blue whale, *Balaenoptera musculus*," *Journal of the Acoustical Society of America*, 50:1193-1198.

- Cummings, W. C., P. O. Thompson and S. J. Ha., 1986. "Sounds from Bryde, *Balaenoptera edeni*, and finback, *B. physalus*, whales in the Gulf of California," *Fishery Bulletin*, 84(2):359-370.
- Cummings, W. C. and P. O. Thompson, 1994. "Characteristics and seasons of blue and finback whales sounds along the U.S. west coast as recorded at SOSUS stations," *Journal of the Acoustical Society of America*, 95:2853 (A).
- D'Spain, G. L., W. S. Hodgkiss and G. L. Edmonds, 1991. "Energetics of the deep ocean's infrasonic sound field," *Journal of the Acoustical Society of America*, 89:1134-1158.
- Edds, P. L., 1982. "Vocalizations of the blue whale, *Balaenoptera musculus*, in the St. Lawrence River," *Journal of Mammalogy*, 63:345-347.
- Evans, W. E., 1967. Vocalizations among marine mammals in Tavolga WN, ed., *Marine Bioacoustics Vol 2*, Pergamon Press, NY, pp 159-186.
- Jones, R.M., J. P. Riley and T. M. Georges, 1986. "HARPO: A Versatile Three-Dimensional Hamiltonian Ray Tracing Program for Acoustic Waves in an Ocean with Irregular Bottom," Wave Propagation Laboratory, National Oceanic and Atmospheric Administration, Boulder, CO, 457 pp.
- Kibblewhite, A. C., R. N. Denham and D. J. Barnes, 1967. "Unusual low-frequency signals observed in New Zealand waters," *Journal of the Acoustical Society of America*, 41:644-655.
- McDonald, M. A., J. A. Hildebrand and S. C. Webb, 1995. "Blue and fin whales observed on a sea floor array in the northeast Pacific," *Journal of the Acoustical Society of America*, 98:712-721.
- Miller, J. H. and C.-S. Chiu, 1992. "Localization of the sources of short duration acoustic signals," *Journal of the Acoustical Society of America*, 92:2997-2999.
- Miller, J. H., J. L. Benson, C.-S. Chiu and K. B. Smith, 1996. "FY95 Results: Transient Localization Project at NPS," *Tech Rpt NPS-UW-96-001PR*, Naval Postgraduate School, Monterey, CA.
- Northrup J., W. C. Cummings and P. O. Thompson, 1968. "20-Hz signals observed in the central Pacific," *Journal of the Acoustical Society of America*, 43:383-384.
- Northrup J., W. C. Cummings and M. F. Johnson, 1971. "Underwater 20 Hz signals recorded near Midway Island," *Journal of the Acoustical Society of America*,

49:1909-1910.

Payne, R. and D. Webb, 1971. "Orientation by means of long range acoustic signaling in baleen whales," *Ann. N. Y. Acad. Sci.*, 188:110-141.

Thompson, T. J., H. E. Winn and P. J. Perkins, 1979. Mysticete sounds in Winn HE and BL Olla, eds, *Behavior of Marine Animals: Current Perspectives in Research. Volume 3: Cetaceans*, Harvard University Press, Cambridge MA, pp 403-431.

Thompson, P. O. and W. A. Friedl, 1982. "A long term study of low frequency sound from several species of whales off Oahu, Hawaii," *Cetology*, 45:1-19.

Thompson, P. O., L. T. Findley and O. Vial, 1987. "Doublet stereotyped and other blue whale phonations recorded in the Gulf of California, Mexico," in *Proceedings of the 7th Biennial Conference on the Biology of Marine Mammals. December 1987*, Miami, FL, p 70.

Thompson, P. O., L. T. Findley, and O. Vial, 1992. "20-Hz pulses and other vocalizations of fin whales, *Balaenoptera physalus*, in the Gulf of California, Mexico," *Journal of the Acoustical Society of America*, 92:3051-3057.

Thompson, P. O., L. T. Findley, O. Vidaland and W. C. Cummings, 1996. "Underwater sounds of blue whales, *Balaenoptera musculus*, in the Gulf of California, Mexico," *Marine Mammal Science*, 12(2):288-292.

Tolstoy, A., 1993. *Matched Field Processing for Underwater Acoustics*, World Scientific Publishing Co, River Edge, NJ.

Walker, R.A., 1963. "Some intense, low-frequency, underwater sounds of wide geographic distribution, apparently of biological origin," *Journal of the Acoustical Society of America*, 35:1816-1824.

Watkins, W. A., 1981. "Activities and underwater sounds of fin whales," *Sci. Rep. Whales Res. Inst.*, 33:83-117.

Watkins, W. A., P. Tyack, K. E. Moore, and J. E. Bird, 1987. "The 20-Hz signals of finback whales (*Balaenoptera physalus*)," *Journal of the Acoustical Society of America*, 82:1901-1912.

Winn, H. E. and P. L. Perkins, 1976. "Distribution and sound of the minke whale, with a review of mysticete sounds," *Cetology*, 19:1-12.

Yochem, P. K. and S. Leatherwood, 1985. Blue Whale *Balaenoptera musculus*



(Linnaeus, 1758), *Handbook of Marine Mammals*, Vol. 3, Academic Press, Inc., London, pp. 193-240.

## INITIAL DISTRIBUTION LIST

1. Defense Technical Information Center.....2  
8725 John J. Dingman Rd., Ste 0944  
Ft. Belvoir, VA 22060-6218
  
2. Dudley Knox Library.....2  
Naval Postgraduate School  
411 Dyer Rd.  
Monterey, CA 93943-5101
  
3. Professor Robert H. Bourke (Code OC/BO).....1  
Department of Oceanography  
Naval Postgraduate School  
883 Dyer Rd., RM 324  
Monterey, CA 93943-5122
  
4. Professor Ching-Sang Chiu (Code OC/CI).....1  
Department of Oceanography  
Naval Postgraduate School  
883 Dyer Rd., RM 324  
Monterey, CA 93943-5122
  
5. Professor Curtis Collins (Code OC/CO).....1  
Department of Oceanography  
Naval Postgraduate School  
883 Dyer Rd., RM 324  
Monterey, CA 93943-5122
  
6. Dr. Bob Gisner.....1  
Office of Naval Research  
800 North Quincy Street  
Arlington, VA 22217
  
7. Dr. Walter H. Munk.....1  
UCSD - Scripps Institute of Oceanography  
9500 Gilman Dr. IGPP - 0225  
La Jolla, CA 92093-0225
  
8. Dr. Peter Worcester.....1  
UCSD - Scripps Institute of Oceanography  
9500 Gilman Dr. IGPP - 0225  
La Jolla, CA 92093-0225

9. CDR John Curtis, N874C.....1  
Office of the Chief of Naval Operations  
2000 Navy Pentagon  
Washington, DC 20350
10. Dr. Dennis Conlon.....1  
IUSS Program Office (PD 80)  
SPAWAR  
2451 Crystal Drv.  
Arlington, VA 22245-5200
11. Dr. Jeff Simmen (Code 3210A).....1  
Office of Naval Research  
800 North Quincy Street  
Arlington, VA 22217
12. Dr. Ellen Livingston (Code 3210A).....1  
Office of Naval Research  
800 North Quincy Street  
Arlington, VA 22217
13. LCDR Carl Allen Hager, USN.....1  
474 Arrowhead Lane  
Litchfield, IL 62056